

6. Stop Light System

A: WIRING DIAGRAM


1. STOP LIGHT

<Ref. to WI-120, SCHEMATIC, Stop Light System.>

B: INSPECTION

1. STOP LIGHT SWITCH

Measure the stop light switch resistance.

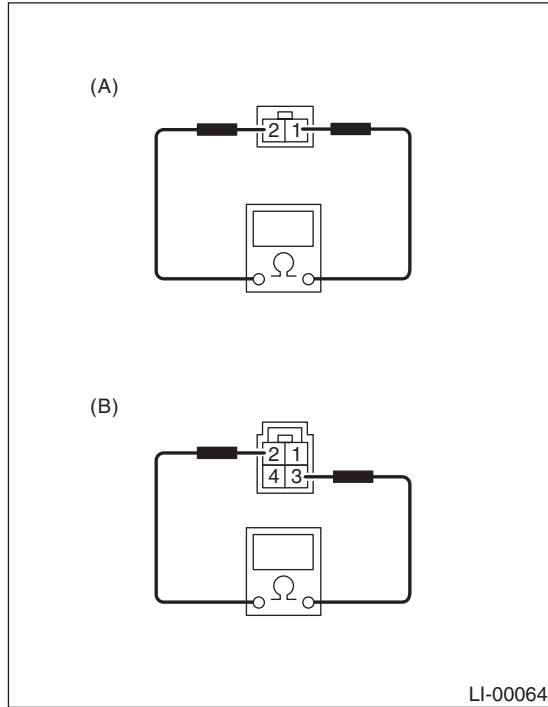

(A) Without cruise control

(B) With cruise control

Switch position	Terminal No.	Standard
When brake pedal is depressed	1 and 2: Without cruise control	Less than 1 Ω
When brake pedal is released	2 and 3: With cruise control	More than 1 MΩ

7. Interior Light System

A: WIRING DIAGRAM


1. INTERIOR LIGHT

<Ref. to WI-118, SCHEMATIC, In Compartment Light System.>

B: INSPECTION

1. DOOR SWITCH

Measure the door switch resistance.

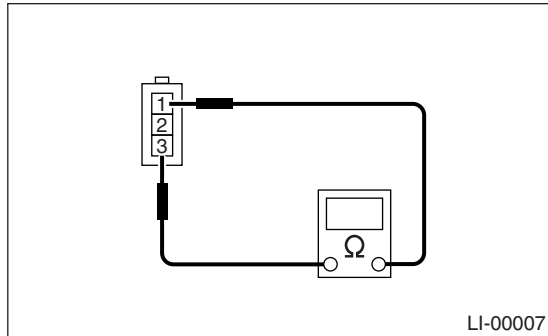

Switch position	Terminal No.	Standard
When door is opened	1 and 3	Less than 1 Ω
When door is closed		More than 1 M Ω

2. REAR GATE LATCH SWITCH

Measure the rear gate latch switch resistance.

Switch position	Terminal No.	Standard
When rear gate is opened	1 and 2	Less than 1 Ω
When rear gate is closed		More than 1 M Ω