


4. Radio Body

A: REMOVAL


- 1) Disconnect the ground cable from battery.
- 2) Remove the front cover. <Ref. to EI-36, REMOVAL, Console Box.>
- 3) Apply the thick protective tape (A) to instrument panel pad to protect the surface of it.

NOTE:

Also apply the protective tape to the deep inside portion between center console panel and instrument panel pad.

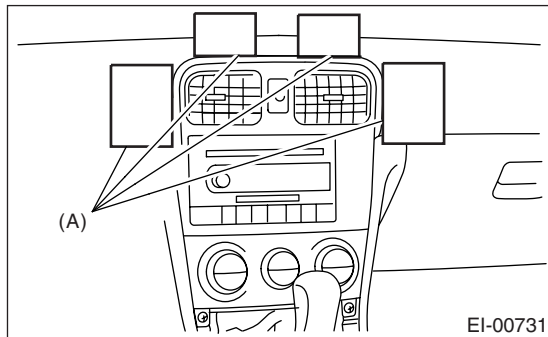

- 4) Loosen the screws.

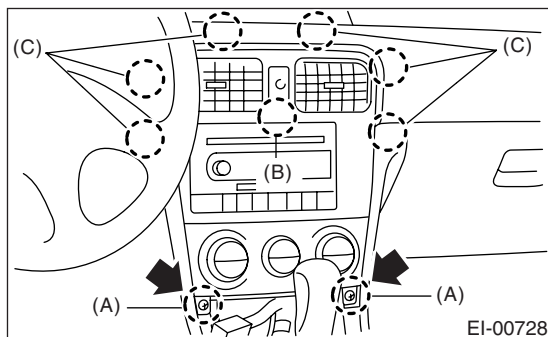


- (A) Screw
- (B) Clip
- (C) Claw

- 5) Insert the flat tip screwdriver to the position (A) and release the claw with pulling out the lower portion of center console panel.

CAUTION:

Do not insert the flat tip screwdriver into any portion except for indicated in the figure. The instrument panel may be damaged.

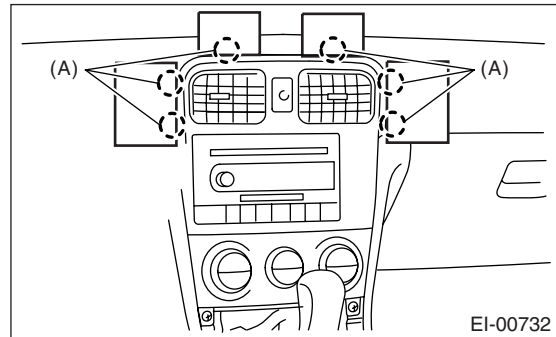

(A) Inserting position of flat tip screwdriver

- 6) Disconnect the connector.
- 7) Remove the fitting screws, and slightly pull out the radio from center console.
- 8) Disconnect the harness connectors and antenna feeder cord.

B: INSTALLATION

Install in the reverse order of removal.