


SUNROOF SWITCH

SUNROOF/T-TOP/CONVERTIBLE TOP (SUNROOF)

6. Sunroof Switch

A: REMOVAL


- 1) Disconnect ground cable from battery.
- 2) Remove the spot map light. <Ref. to LI-24, REMOVAL, Spot Map Light.>
- 3) Disconnect harness connectors and remove sunroof switch (A).

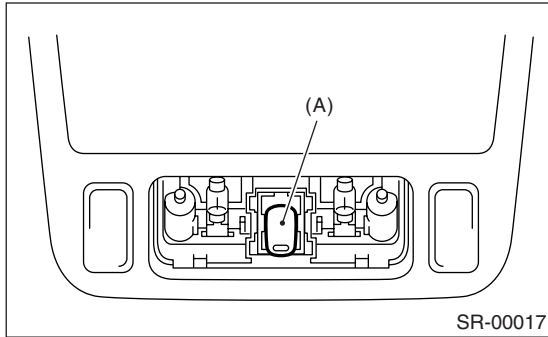

B: INSTALLATION

Install in the reverse order of removal.

C: INSPECTION

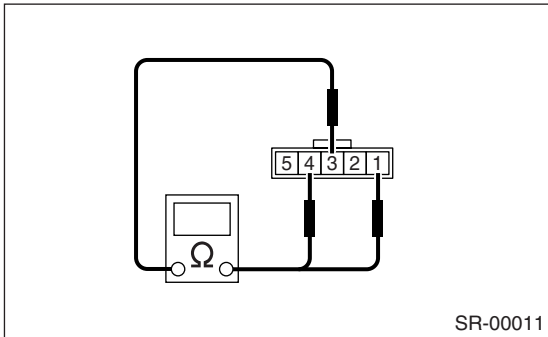

Check continuity between terminals when operating the switch.

Switch	Terminal No.	Standard value
Open	1 — 3	Less than 1 Ω
Close	3 — 4	More than 1 M Ω

SUNROOF SWITCH

SUNROOF/T-TOP/CONVERTIBLE TOP (SUNROOF)
